



Illawarra Amateur Radio Society

## Propagator JULY 2023

### Upcoming Meeting on the 11<sup>th</sup> JULY 2023

The next meeting **will be at the** Blue Scope Steel visitors centre **7.30pm**

Blue Scope Northgate entrance off Springhill Road (See website for detailed map)

THE  FOLLOWS A COVID19 SAFE PLAN



VK2RUW (Knights Hill)  
34.6231° S, 150.6942° E  
**QF55IJ**



AMATEUR RADIO IN THE ILLAWARRA SINCE 1948



VK2RMP (Maddens Plains)  
34°15'30.6"S 150°56'47.4"E  
**QF55LR**

# VK2AMW

**This year is our 75<sup>th</sup> anniversary**

# Our last meeting 13<sup>th</sup> June 2023

## FILTERS

### Design and testing

The Theory ☺

$$X_C = -\frac{1}{2\pi fC}$$
$$X_L = 2\pi fL$$
$$L = \frac{\left(\frac{1}{2\pi f}\right)^2}{C} \quad C = \frac{\left(\frac{1}{2\pi f}\right)^2}{L}$$

Resonant Frequency Formula

$$f = \frac{1}{2\pi \cdot \sqrt{L \cdot C}}$$

where 'f' = frequency in hertz  
'L' = inductance in henrys  
'C' = capacitance in farads

Cut-Off Frequency  
 $F = 1/(2\pi RL) \cdot \sqrt{R/L}$


Characteristic Impedance  
 $Z = \sqrt{R/L}$

DO NOT PANIC




We had a great turnout of members and guests on Tuesday night's meeting. All the test gear and sample filters supplied, all we needed was some keen hands-on participants, we had plenty 😊

Thanks to Ned VK2AGV who was keen to assist with testing & setup, Mal VK2DXM who brought along a NANO VNA and some filters for testing. We were also joined by St George ARC members John VK2EKG & Paul VK2GX. They brought along some really well-built home brew cavities for testing.

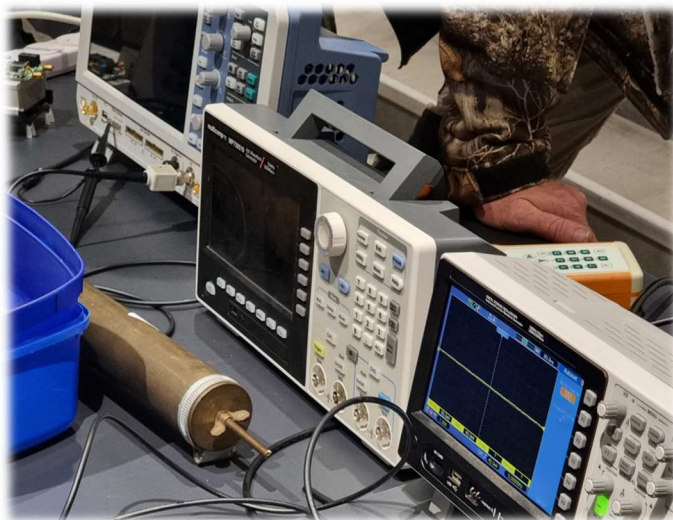



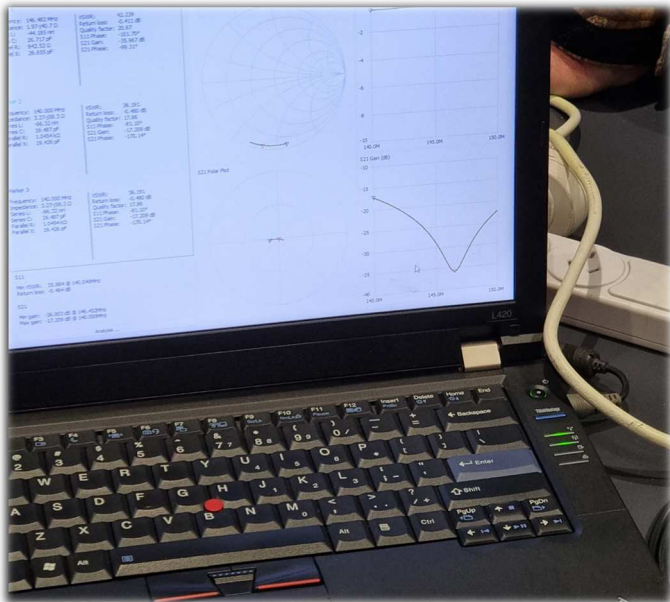

It was one of those special meetings that you remember for a while.

The chocolate biscuits didn't hang around for too long and everyone had a good chat and many "technical" discussions after 😊

Perhaps we also added unwanted **cavities** due to the sweets and biscuits

If you missed out and want to learn more about Filters and how to test them using analysers, VNA's, signal generators, Oscilloscopes and even the simple antenna analyser, drop us an email and we will be more than happy to share the information, please send an email to [iars.keithb@gamil.com](mailto:iars.keithb@gamil.com)

# NEXT MEETING

## SHOW & TELL AND!!!.....

How would you like to win your very OWN  
NANO VNA?



If the answer is YES! then all you have to do is present a SHOW and TELL at our next meeting and if the members select your "show and tell" as the most interesting (not necessarily the most flashy), you go home with this magic prize. \*\*

**Only two rules apply.**

- 1) **Must be an IARS member** to be eligible for the prize (you can see John EJJ if you are not)
- 2) **Must have the most interesting show and tell**

There will be the usual refreshments with some nice biscuits to enjoy with your mates, so, pop along next meeting.

Look forward to seeing who has the best story, project, antenna, shack, invention or whatever may interest our radio enthusiasts.

## *Disposables Donation Table*

Please keep the support for this going and bring oddities in and take some home for a small donation to the IARS. With the next meeting please bring along and donate those old items that you no longer use and may even have thought about throwing it in the bin, someone else may be looking for that very part. Wire, pieces of coax, old parts, plug packs, power supplies, capacitors, resistors, coils, tubes, knobs, anything that someone can use. **Thanks to those that support this every month, awesome!**





For \$5 you can earn some good cash and all monies go to your society, win-win.

As usual see Simon VK2KU, the fella with the coloured balls and big smile



Snowball was not drawn in the 13<sup>th</sup> June meeting but will be operating at the next meeting

In Simon's words "I'LL BE BACK"

.....  
**Congratulations to our newest licenced member.**

**Adam Moylan VK2AEV**

Adam has just recently passed his AMC examinations through the IARS.

Please join us in welcoming Adam to the amateur radio world and keep an ear out for him on air.

We would also like to wish Vinnie, VK2VIN all the best of luck with his studies, he has decided to upgrade from Standard to Advanced, GO VINNIE!!

***Is it your turn next to get your licence??? Or just want to Upgrade? It is as easy as One, Two, Three 😊***



**Looking to Upgrade to Standard or advanced and even obtaining your Foundation license we have remote assessing available.**

The IARS **can help** with obtaining your Foundation, upgrading to Standard or Advanced from *the comfort of your own home*, and its FREE!!! \*

We have approved AMC accessors that can offer remote assessments for the AMC.

Please contact Keith VK2KQB at [iars.keithb@gamil.com](mailto:iars.keithb@gamil.com) for further information.

**Your society supports further learning**, please find out more on how we can help you. AMC website is [Australian Maritime College - Australian Maritime College | University of Tasmania \(amc.edu.au\)](http://AustralianMaritimeCollege-AustralianMaritimeCollege|UniversityofTasmania(amc.edu.au))

(\* Training, assistance, and assessment is free, however there are costs associated with the ACMA call sign and AMC examinations)

# Membership fees

We still have many membership payments outstanding and are hoping that we can get this all settled before the next meeting. The IARS membership fees are still one of the **lowest at \$25.00 normal, \$20 concession**. This relates to \$2.20 per month, for 11 meetings (less than the price of a cup of coffee)



**Your membership fees keep your club operational, please support your club.**

All monies from our interest on investment, donations and membership fees goes to support the club with **Public liability insurances, Repeater maintenance, Repeater site fees, Blue scope meeting hall rental, IARS call signs with the ACMA, Coffee, tea & refreshments, Outings & picnics and Christmas dinner.**

**Excellent value for money!!!!**

*We want to thank the members who have paid membership and the extra donations we received this year, much appreciated.*

To make payments you could either pay John VK2EJL at the next meeting OR use the IARS bank account (info below),

**please add your call sign or name with the payment, thank you.**

Bank: IMB Wollongong  
Account name: Illawarra Amateur Radio Society  
BSB: 641800  
Account number: 100023291



Please join us in welcoming our newest members

1. Adam Moylan
2. Jose' Barradas
3. Bruce North

Welcome to the IARS family

Don't forget the **THREE** weekly IARS nets as below (Yes there are **Three** now)



**to the IARS NETS**



**IARS Tuesday evening weekly 80m NET on 3.666MHz at 8.30pm hosted by Mal VK2DXM and Rob VK2MT**

Join us every Tuesday evening, *expect the second Tuesday of the month* for a great get together on 80m. Signal reports, news and general discussions are the agenda.

**Saturday Morning EAST COAST NET hosted by Steve VK2BGL at 9.30am**

You are invited to join Steve every **Saturday at 9.30am** on our **146.850MHz** repeater (linked to 146.675MHz) or **VK2BGL-R** on Echo-link for a very enjoyable morning of general discussions from amateurs who log in from all over the world. This NET is linked to multiple repeater systems including VK2RFS south coast. Join Steve and everyone for a very enjoyable 2 hours on Saturday morning.

The IARS would also like to thank Doug VK2XLJ, who is always willing to assist whilst Steve is away.

**Thursday afternoons at 12pm and is run by Chris VK2CY.**


This Net is made up of many retired Marine Radio Operators and Radio Inspectors, but everyone is welcome. As you can imagine their topics of discussion can be far reaching, informative and enlightening. The Net operates on the Society's 2 metre repeaters of 146.850 and 146.675, while out-of-towners can check-in on Echolink via VK2MT-R.

## IARS REPEATERS



**VK2RUW (Knights Hill)**

**146.675 MHZ >>>>**

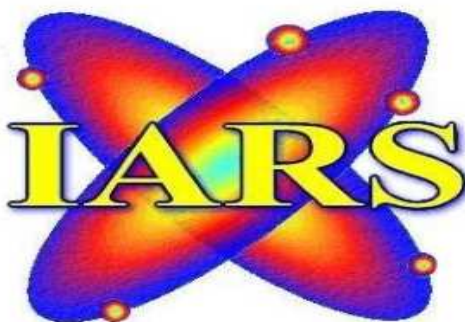

**linked**

**<<<<**



**VK2RMP (Maddens Plains)**

**146.850 MHZ**

## Current STATUS

- 438.225 with a - 5MHz offset. **OK**
- 146.975 with a -600kHz offset NO CTCSS, C4FM enabled **OK**
- 146.850 with a – 600kHz offset (linked to 146.675) NO CTCSS **OK**
- 146.675 with a – 600kHz offset (linked to 146.850) NO CTCSS **OK**
- 53.650Mhz with a – 1Mhz offset 123Hz CTCSS tone **OK**
- 438.725Mhz with a -5mHZ offset DMR only, **OK**
- 1296.850Mhz Beacon with simplex repeater function – **OK**
- Echo-link VK2MT-R is back on the air on 146.850MHz and 146.675MHz via VK2MT-R and VK2BGL-L when linked - **OK**

The IARS welcomes any feedback on our repeater systems.

Please send all your feedback to [iars.keithb@gmail.com](mailto:iars.keithb@gmail.com) and it will be passed on to our repeater team.

Any donations to help us maintain our great repeater system will be greatly appreciated. Please check our banking details on our website at [www.iars.org.au](http://www.iars.org.au) under the Contact details page.

As reference of the donation please add your Call sign and the words "Repeater Donation"

XX



## LOOKING FOR SOMETHING to SWAP, BUY, SELL, an OLD PART

Parts you may need for repairs or some radio gear you no longer need that could go to a new home.....?

Email [iars.keithb@gmail.com](mailto:iars.keithb@gmail.com)

- **Looking for** old test equipment laying around in your shack, **working or NOT!** Email Keith at [vk2kqb@gmail.com](mailto:vk2kqb@gmail.com)
- **GIVEAWAY** We still have two valve radiograms to anyone interested. Please email the secretary at [iars.keithb@gmail.com](mailto:iars.keithb@gmail.com) or [secretary@iars.org.au](mailto:secretary@iars.org.au) for pickup details , please don't let this great offer pass you buy as it will not be around for much longer.







Share it with us, this could be suggestions, technical ideas, circuit diagrams, IARS community projects, pictures of your latest shack project, in fact **ANYTHING of interest**

Let us know by return email [iars.keithb@gmail.com](mailto:iars.keithb@gmail.com)

Also, if you have some IARS related pictures or information that we can put on the **IARS website**, please let us know and we can get that happening.

**This month's Tech Corner contribution, Upgrading a Marconi 2955R to LCD display**


**“ Ditch the CRT? ”, Keith VK2KQB**



I recently purchased a Marconi 2955R communications test set. The good news is that I got it for a reasonably good price, the bad news it needed to warm up for 30 minutes before I could use it due to a dodgy OCXO. Oven Controlled Crystal Oscillator for those unfamiliar with the term OCXO. I was also nervous knowing that the tester being about 30 years vintage, has a CRT for a display. CRT's don't last for ever and being over 30 years, I was a little concerned about the health of the CRT and associated components like the LOPT. (When would it come to rest)

Even though my first job was replacing the OCXO, I couldn't help looking for a suitable replacement for the CRT should it decide to fall over. Murphy was out of town so luck would have it that I came across a local (Sydney) ham operator Kevin, who has obviously spent many hours developing an LCD display to replace the CRT. I jumped at this straight away even though my CRT was still operational.

Kevin Jardine, VK2KVJ was very helpful in supplying the necessary information of the interface boards he developed and how to set this up and make it work. I could not believe my luck that he also had a solution for my slowly dying OCXO. His upgrade not only replaced the CRT but gave me the opportunity to replace the whole Marconi CRT control board AC/1, which housed the dodgy OCXO. The new OCXO board with the 10MHz reference to run the machine was obtained from Kevin's contact in Norway, Askild Elde, who for under \$100.00 shipped the 10MHz OCXO board to Australia. An absolute bargain and NOT from FleaBay! (Although I had to use the services of fleabay to obtain a LCD panel)

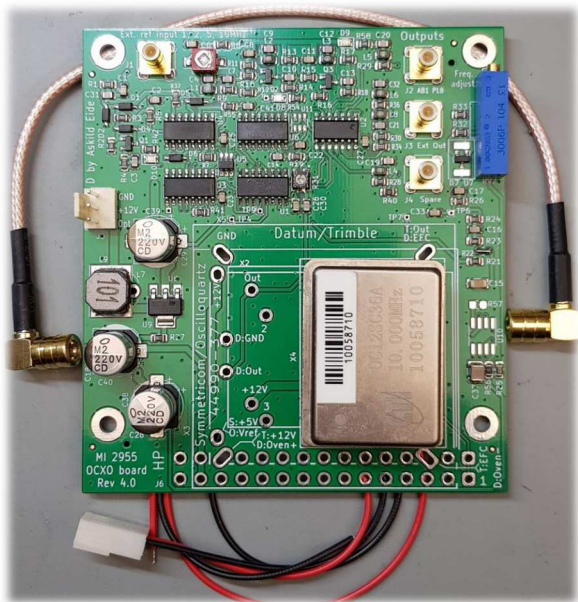

New OCXO Board from Askild, Norway




Excellent, 300MHz +/- 02 Hz on a recently calibrated counter.



Video Board designed and programmed by Kevin VK2KVJ



LCD Panel purchased from EBAY.

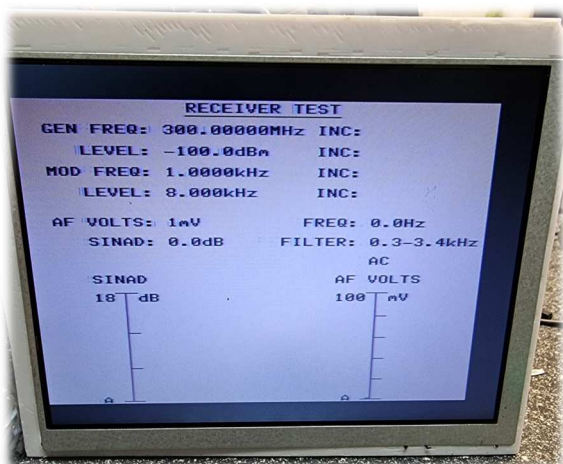

LCD Panel set to White background (not installed yet)



Installed and set to a subtle green

At this moment a very happy camper with my Marconi 2955R working beautifully.

If you require any more information on upgrading your test set, please contact me at [vk2kqb@gmail.com](mailto:vk2kqb@gmail.com)



# Guide to RF Coaxial Connectors and Cables

Given that typical RF systems are comprised of any number of items, e.g. RF generators, amplifiers, attenuators, power meters, couplers, antennas, etc., it is not uncommon that a great deal of thought is given to these "high end" devices while mundane items such as connectors and cables are often treated as an afterthought. With a wide variety of coaxial connectors and cables available for use in the RF and Microwave spectrum not giving these essential components too much thought is a misstep and can result in undesirable system degradation.

RF coaxial connectors provide vital RF links in communications, broadcast, EMC testing, commercial and military, as well as test and measurement fields. In this guide, you will learn about the different types of RF Coaxial Connectors and Cables and the various uses for each. Guidance and insight will be provided to assist in choosing connectors best suited to accommodate your specific applications.

## 1.0 RF Coaxial Connectors

The vast array of RF connectors available can be overwhelming, but they are all characterized by just a few key parameters. The most obvious characteristic of a connector is its physical size.

Other considerations include power handling and frequency range capabilities. To ensure maximum power transfer, the characteristic impedance of the connector should match the source and load. All of these characteristics, along with connector durability and cost, must be considered for each application.

The most commonly found connector types in RF applications are available in both male and female configurations, standard and precision grades, high frequency and in some cases high power versions.

### 1.1 BNC

The BNC connector is perhaps one of the most widely used connectors in the test and measurement field. It was developed by Bell Labs in the early 1950s and is typically used for low power interconnections on RF test equipment such as audio and signal generators, oscilloscopes and amplifiers. The inexpensive BNC utilizes a bayonet retention collar to provide quick mate/de-mate action and also serves to prevent accidental disconnection. The BNC connector is typically designed to provide a characteristic impedance of 50 or 75 ohms, depending on the application. BNC connectors are generally rated for use in the DC – 4 GHz frequency range; however, they are rarely used above 500 MHz. While they are capable of handling 80 – 100 Watts average power up to 1 GHz, they typically do not have a maximum power rating. They do however carry a maximum voltage rating of about 500 V.



### 1.2 TNC

The TNC connector is merely a threaded-version of a BNC connector. It provides a more secure connection and thus reduces vibration issues that can be found with the BNC. The TNC will operate at higher frequencies than the BNC and there are also high power TNC versions available.



### 1.3 SMA

The Sub-miniature Type A connector was developed in the 1960s and has proven to be a very popular choice in low power, high frequency applications. It was originally intended for use on 141 type semi-rigid coaxial cable, where the center conductor served as the center pin. Its use was later expanded to flexible cables with soldered on center pins. It consists of an inner contact ring and a hexagonal clamping nut attached via a snap ring. Special wrenches are used to achieve the correct torque; typically 5 lb-inches. There are different versions available such as high frequency, self-locking and precision. Commonly used as interconnects on RF boards, microwave filters, and attenuators, the SMA will operate up to 18 GHz. Precision versions extend the upper frequency limit to 26.5 GHz. Although the SMA will mate to the 2.92mm/'K', 3.5mm, and APC-3.5 connectors, it is not recommended as slight dimensional differences may result in connector damage.





### 1.4 3.5 mm

The 3.5mm connector is a precision connector primarily developed at Hewlett Packard (now Keysight Technologies). It is similar in design to the SMA but employs an air dielectric for higher performance.

These connectors perform well to 34 GHz, but typically are used to 26.5 GHz. Since the 3.5mm is a precision connector, it is more expensive than similar designs and is thus often found in calibration kits and metrology applications as opposed to common test and production applications.



### 1.5 2.4 mm

Developed in the mid 1980s by Hewlett Packard (now Keysight Technologies), this 50 GHz connector employs a 4.7mm outer conductor arranged around a 2.4mm center conductor. The 2.4mm is available in three grades; general purpose, instrument and metrology. Since these connectors are not directly compatible with the SMA family, precision adapters are required to mate a 2.4mm connector to an SMA.



### 1.6 2.92 mm/K Type

This connector was designed and developed by Wiltron (now Anritsu Corporation). Performance with this connector is comparable to the 2.4mm, although the maximum frequency is limited to 40 GHz.

The "K type" designator is derived from its ability to cover all the K-band frequencies.



### 1.7 N Type

This is one of the most common RF connectors in use around the world today. This high-performance connector was designed by Bell Labs in the 1940s with a threaded coupling interface and internal gasket to keep out the elements. The N connector is rugged, relatively inexpensive and the standard version is capable of mode-free operation to 11 GHz. Precision versions push the upper frequency limit to 18 GHz. Commonly found on instruments such as amplifiers, directional couplers, power meters, and coaxial attenuators, this threaded, durable connector provides a very secure connection. There are both 50 and 75 ohm versions available; the latter commonly used in the CATV industry.



### 1.8 C Type

The C connector was designed by Amphenol to handle high power applications as well as provide quick mate/de-mate action. It uses a dual-stud bayonet retention collar similar in design to the BNC.

The popularity of the C connector has diminished over the years but is still available. The 7-16 DIN has been used as a replacement in many cases due to its similar frequency and power capabilities. There are 75 ohm versions available as well as an "SC" version which incorporates a threaded collar for a more secure connection.



### 1.9 7-16 DIN

This is a more recent connector in the United States, compared to the other connectors previously mentioned. The 7-16 DIN was developed by the Deutsches Institut für Normung, (translation: the German National Standards Organization); hence the "DIN" designation. The numerical part of its name refers to the size of the inner and outer conductors; "7" for the inner conductor OD in mm, and "16" for the outer conductor ID in millimeters. The 7-16 uses an M29 x 1.5 threaded coupling nut.

The 7-16 DIN connector was designed with low inter-modulation in mind for communications applications. Other common applications include antennas, base station connections, RF cables, SATCOM and lightning protection systems.





## 1.10 EIA Series

The EIA series of coaxial connectors are available in EIA 7/8", EIA 1 5/8", EIA 3 1/8", EIA 4 1/2" and EIA 6 1/8" versions, all of which are suitable for RF applications. Designed to support cables with foam or air-dielectric, they consist of a main body, mounting flange with various bolt circles, and typically have interchangeable/removable center conductor "bullets". Due to the flexibility of their design, EIA connectors are often not identified as male or female, as the connector can typically be configured as either. EIA connectors can be found in high power applications on directional couplers, coaxial cables, power amplifier outputs, and interconnects on communication towers and antennas. The most common sizes found in general test and measurement applications are the 1 5/8" and 7/8" EIA. There are a variety of adapters available to adapt the EIA series to some of the larger RF connectors such as the 7-16 and N type.



## 1.11 Making the Right Selection


Now that you have a better understanding of the most popular RF coaxial connector types, let's consider the thought process that should be applied to make intelligent connector choices.

It is important to remember that the specific application will determine the frequency range and power handling requirements of the connector. The chart below is a reference to use when selecting the proper connector type. The chart provides general guidance on power handling of coaxial connector types under the conditions of matched source/load impedance, in a controlled laboratory environment, with connectors of common construction and materials.

### Putting it all together

Now that we have reviewed the most popular RF coaxial connector types, let's consider the thought process that one must apply to make intelligent connector choices.

First of all, the specific application will determine the frequency range and power handling requirements of the connector. The summary chart below provides guidance in the selection of an appropriate connector type to accommodate system power while operating at the highest frequency required.

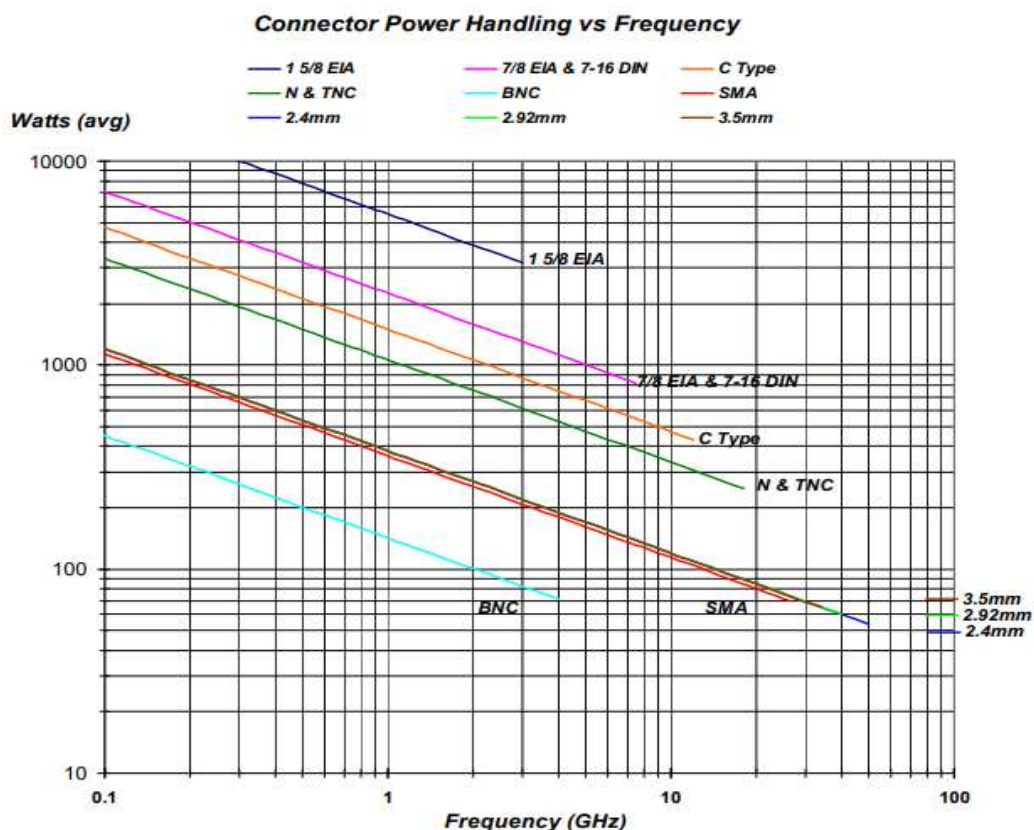



## 1.12 Connector Construction and Materials

Materials used in the connector affect power handling capability, with the dielectric material having the greatest effect. Most connectors today use one of several fluoropolymers to capture and support the center conductor of the connector, with polytetrafluoroethylene (PTFE) being the most widely used. Air dielectric connectors such as precision 2.4, 2.9, or 3.5mm connectors may avoid PTFE altogether, and use a higher-temperature material (e.g. Ultem 1000). In other cases, high power connectors may use thermally conductive dielectrics to provide better cooling of the center conductor than PTFE can offer.

The other material of interest is the plating on the center conductor. High temperatures can cause rapid oxidation of the contact materials, increasing resistance and I<sup>2</sup>R losses. This increased power dissipation drives the temperature even higher, into an eventual run-away condition. Unfortunately, this behavior is not nearly as easily characterized as the dielectric heating, as it is very dependent on the environmental conditions (eg. lab vs. marine) and often proprietary plating materials and thicknesses. However, the more easily characterized dielectric material limitations are the more typical short-term failure mode and power limit.

## 1.13 Temperature


The temperature of a connector will be influenced by both the ambient air temperature, as well as the temperature of the connected device. Heat exchange through conduction with the mating connector/device will typically have a greater effect than ambient temperature. The objective is to ensure that the internal connector temperature does not exceed the temperature ratings of the internal components, which is primarily limited by the dielectric material temperature rating. Power handling will de-rate from full rated power at the rating temperature, decreasing to zero power at the maximum allowable temperature of the connector materials. Be sure to consult the connector manufacturer for their temperature derating curve.

## 1.14 Reflected Power

When operating into a mismatched load, some of the incident power will be reflected back to the source. The combination of incident and reflected power traveling on the same cable causes standing waves to form. The measurement of these standing waves is the Voltage Standing Wave Ratio (VSWR). These standing waves result in current peaks and nulls along the cable at quarter wavelength intervals. Higher current translates to higher power, and thus greater heat. The locations along the cable where the peaks of the standing wave occur will be subjected to increased localized heating, resulting in alternating higher and lower temperature regions occurring along the cable. To account for the localized heating due to peak standing wave power, use the following derating calculation:

This is shown graphically here:

$$\frac{1}{\left(1 + \left(\frac{\text{VSWR} - 1}{\text{VSWR} + 1}\right)^2\right)}$$

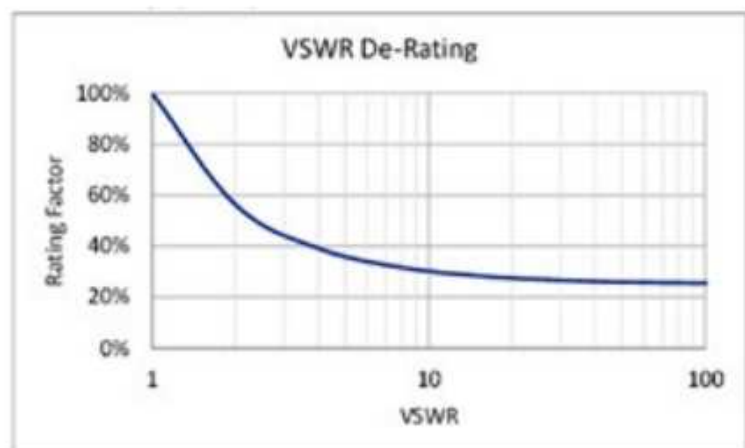




### 1.14 Reflected Power

At lower frequencies, where wavelengths are long and current peaks are broad and well-separated from the adjacent current nulls, using peak standing wave power is good practice. However, applying the same rule to smaller connectors used at high frequencies may result in impractically conservative power ratings. Due to the short wavelengths at high frequencies, the localized hot and cold areas are small and in close proximity, thus encouraging heat transfer between these regions, reducing the peak temperatures. This thermal averaging reduces the peak temperatures, and as frequencies increase, the VSWR derating begins to approach the average standing wave power, defined as:

These two derating curves are shown here:

$$\frac{1}{1 + \frac{\text{VSWR} - 1}{\text{VSWR} + 1}}$$

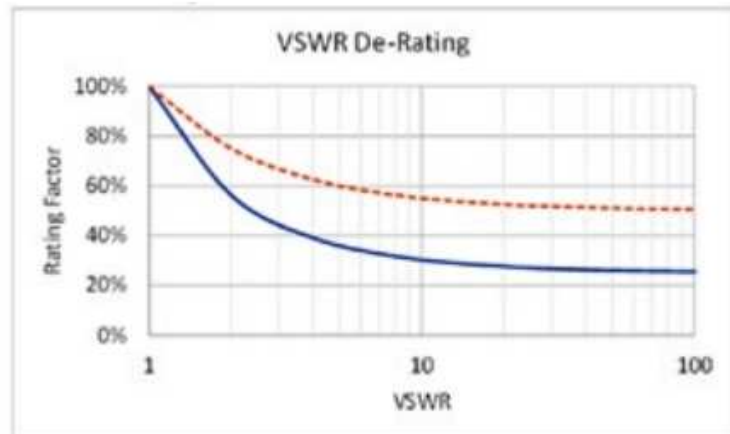

This thermal averaging effect may sometimes allow a more aggressive power rating at higher frequencies, somewhere between the peak standing wave power derating, and the average standing wave power derating. If choosing to do this, consult with the connector manufactures for guidance.

### 1.15 Pulsed Operation

When operating with pulsed signals, in addition to the aspects previously mentioned, there are several additional factors to consider.

Connectors can handle pulse power levels that are greater than their continuous CW power rating. This is due to the pulse off time, when no heating occurs. This allows the connector to cool during this time, and thus experience thermal averaging over a full waveform cycle. However, the average power over a full cycle of the waveform must not exceed the CW power rating of the connector. The average power is calculated as follows:

$$\text{AveragePower} = \text{PulsePower} * \frac{\text{DutyCycle}}{100}$$

In pulsed applications where the average power approaches the continuous CW power rating of the connector, consult the connector manufacture for additional guidance.

Voltage breakdown must also be considered when operating at very high-power levels. Operating with very high pulse power levels with very short duty cycles may result in an acceptable average power level. However, the high voltage during the pulse may exceed the breakdown voltage of the dielectric material. This could result in arcing between the center conductor and shield/ground, with subsequent damaged and burned components. Note that voltage breakdown will occur at a lower level in a coaxial configuration than the breakdown level would be in a simple non-coaxial gap configuration of the same distance. Breakdown voltage levels in a coaxial configuration can be calculated to determine connector suitability for an application.

Dielectric material will have a higher breakdown voltage than air. However, when modeling peak voltage limits, good practice dictates using the air breakdown value rather than the higher dielectric material breakdown voltage, as it is likely an air gap will exist somewhere along the RF chain.



## 2.0 Connector Mating and Care

Connectors are crucial components in the RF chain and are instrumental in achieving proper performance in the system. As these components incorporate mechanical action, as well as carrying RF, care needs to be taken in use. A damaged connector, if mated, may propagate damage to the mated connector. As connectors can be costly, taking precautions and using care is well-advised.

### 2.1 Connector Mating

Ensure connectors to be mated are physically compatible and are of the same impedance rating. Be sure to inspect connectors before mating, which may require the aid of a microscope or magnifying glass for sufficient detail. Look for metal particles, fibers, dust, and other contaminants. Check for centered, straight, and undamaged center pin on male connectors, and verify that female jacks are centered, open, and undistorted. Look for body distortion or dents. Depending on jack construction, verify any contacts or spring fingers are in place and undamaged.

Prior to mating, clean both connectors. This is especially important on precision connectors used at higher frequencies, where measurements can be easily affected by contaminants. Clean, dry air, such as canned air, can be used to blow out connectors. Blow across the face of the connector to pull debris out, as blowing directly into the connector may lodge debris more firmly. A small amount of isopropyl alcohol on a lint-free swab can also be used to clean connectors, however, avoid excessive solvent to minimize wicking of solvent into the connector. Air-dielectric connectors are fragile, and if mechanical cleaning of the internal contacts is needed, it must be done with great care. Clean internal and external threads, and check for any burrs or roughness that would interfere with smooth thread engagement.

When mating connectors, carefully align the center axis of both connectors and push straight together as far as possible. While keeping the connector bodies stationary, turn the connector nut by hand to thread onto the mated connector. Never allow the connector bodies to rotate, as this will cause unwanted and unnecessary wear, which may cause permanent damage to one or both connectors' center conductor. The nut should thread freely and fully engage the mating threads by hand. If encountering excessive resistance, remove the connectors to investigate the problem.

After hand tightening the nut, tighten the connector to the specified torque using a torque wrench, while using a wrench to prevent the mating connector from rotating if necessary. Ensure the proper torque spec is used, as excessive torque can deform the connector, while insufficient torque can result in incomplete mating and poor performance. This step is especially important with higher frequency connectors, as slight mechanical changes will have more of an effect with the shorter wavelengths of higher frequencies.

In situations when mating compatible connector types, such as a 3.5mm and 2.92mm connectors, the lower of the two torque specs should be used.

### 2.2 Connector Care

Connectors are an integral part of a system, and degradation or damage of a connector will affect the overall system performance. Proper connector care is crucial to ensure proper system operation.

Some steps that can be taken to protect connectors are:

- Inspect and clean connectors on a regular basis.
- When not in use, dust caps should be installed on connectors and adapters to protect from damage, debris, and contamination.
- Avoid touching mating surfaces.
- Store connectors in a clean and dry environment, and in a protected manner, not loosely together in a container.
- Do not drop connectors, as this can cause physical damage, especially with precision air-dielectric high-frequency connectors.



In addition, implementing use of a connector saver can also be a good practice. In usages where cables and connections are frequently changed, commonly in a production or manufacturing environment, a connector saver will take the wear of normal use. The connector saver acts as a sacrificial wear item, thereby protecting the connector on the test equipment. This allows replacing only the damaged/worn connector saver when needed, rather than having the expense and downtime of connector replacement on the test equipment, or replacement of a cable.

It is important to note that the addition of a connector saver, while mechanically beneficial, is an additional pair of connections in the RF path and may have an adverse effect on the system performance, and could increase measurement uncertainty. Measurements should be taken to characterize the effect of the addition of a connector saver.

Ultimately, due to the mechanical processes involved in connector use, with mating and de-mating cycles, connectors will wear, and performance will degrade. Following proper care, maintenance, storage, and mating technique will maximize the usage cycles.

## **2.2 Adapters**

Using an adapter to convert between connector types needs to be done with care, and with the understanding of the limitations involved. Simply the fact that an adapter is available does not imply that it is appropriate for use in your application. Each connector type has maximum frequency and power limits, and the application needs to operate within both of these limits, for both of the connector types.

Maintaining the same connector type in the RF chain as is used on the amplifier output is a good approach. Using an adapter to convert to a different connector type needs to be done with care, considering the maximum possible frequency and power both of the connector types could be subjected to.

## **2.3 Connector Grades**

For a given connector type, not all connectors are made to the same standards of precision. Some connector types, primarily the higher-frequency types, are available in various quality grades. There are three common categories of connector quality that are used in the industry, with variations in design and terminology between manufacturers.

Metrology grade is the highest precision and quality grade connector, and most expensive. These would commonly be reserved for high accuracy applications such as for calibration purposes and use on calibration standards.

Mid-range grade connectors, sometimes called 'instrument grade', have good performance and provide accurate measurements, and are often used on test equipment and in lab use.

The lowest grade of connector, referred to as 'commercial', or 'production', or 'field' grade connector, has looser tolerance and lower performance, and is the least expensive connector grade. These are most commonly used in production and manufacturing.

Note that the maximum frequency rating of a connector type may vary depending on the grade of the connector, thus use care when operating at the higher end of the connector frequency rating to ensure the connectors being used are of a grade to support the frequency in use. For details of the design and performance differences between grades, reference the manufactures product information.

## **2.4 Inter-Series Compatibility**

Although not intuitive, some connector series families are compatible with other connector series, and can be physically connected. However, each series carries its own power and frequency limits.

The 2.4mm and 1.85mm connectors are mechanically compatible and can be inter-mated.

The 3.5mm, 2.92mm/'K', and SMA connectors have the same basic dimensions, and can inter-mate. However, the looser SMA tolerances can lead to damage to the high-precision 3.5mm and 2.92mm connectors. This primarily applies when using a male SMA connector, where variations in the male center pin diameter or height could damage the female jack of the mating connector.



## 2.5 Connector Gender





Connector gender is often assumed to be determined by the gender of the connector center contact, however this is not the case. Although these do agree in many cases, better practice is to understand the different connector configurations possible, and how connector gender is determined. The connector gender designation is not defined by the center pin, but rather follows the connector body configuration. The center pin will then determine if the connector is Standard Polarity (SP) or Reverse Polarity (RP).

The connector with a coupling nut/shell with internal threads is designated as a male connector (or plug). The connector with a body that has external threads is designated as a female connector (or jack).

Once the connector gender is identified, look to the center conductor configuration to determine if the connector is SP or RP. A male connector with a male center pin, or a female connector with a female center socket, is an SP connector, since the body and center conductor genders match. SP connectors are the common conventional configuration encountered.

A male connector with a female center socket, or a female connector with a male center pin, is an RP connector, as the body and center conductor genders are different. RP connectors are less commonly encountered and were originally developed for use in specialty applications to discourage alteration of the equipment.

Below are images of standard polarity SMA and Reverse Polarity SMA connectors to visualize the configurations.

|        | SPSMA   | RPSMA  |
|--------|---|--|
| Male   |   |   |
| Female |  |  |

Caution needs to be used in situations where RP connectors are available, as although SP and RP connectors can be physically mated, this would result in either damage to the center pins due to being forced together, or no continuity through the connection if two female center sockets are mated.

## 2.6 Connector Gauging

The function of coaxial connectors depends upon the physical interface between the mating connectors. To achieve optimum performance, the center conductor height is very important. If the center conductor is recessed into the connector body beyond the allowable tolerance, the connection will suffer from degraded performance. However, if the conductor protrudes beyond the tolerance, performance may suffer in addition to possible physical damage. A damaged or out-of-tolerance connector may cause damage to each connector it is mated to, spreading damage to other connectors and affecting measurement accuracy as well as causing repair expenses. For these reasons, gauging connectors is a recommended practice to confirm connector dimensions are within acceptable tolerance. Gauge kits are available for most connector types.

Establishing a regular gauging program for cables and equipment is recommended to detect out-of-tolerance conditions and connector damage or wear. Cleaning and inspection should be performed before gauging. Additionally, it is good practice to gauge any connector before first use in the facility, such as cables, adapters, and connectors on equipment.



## 2.7 Connector Specifications

The table below further defines maximum frequency, power, and coupling torque parameters for the RF connectors covered in this reference guide.

Maximum frequency, power and coupling torque

| Connector Type   | Maximum Frequency (GHz) | Maximum CW Power @<br>Max. Frequency (Watts) | Coupling Torque |         |
|------------------|-------------------------|--|-----------------|---------|
|                  |                         |  | (N-cm)          | (in-lb) |
| 2.4 mm           | 50                      | 15   | 90              | 8       |
| 2.92 mm/K        | 40                      | 20   | 90              | 8       |
| 3.5mm            | 34                      | 45   | 90              | 8       |
| SMA precision    | 26.5                    | 70   | 57              | 5       |
| BNC              | 4                       | 70   | N/A             | N/A     |
| TNC              | 18                      | 250  | N/A             | N/A     |
| Type N           | 11                      | 150  | 135             | 12      |
| Type N precision | 18                      | 250  | 135             | 12      |
| Type C           | 12                      | 440  | N/A             | N/A     |
| 7-16 DIN         | 7.5                     | 820  | 226             | 20      |
| 7/8 EIA          | 6                       | 920  | N/A             | N/A     |
| 1 5/8 EIA        | 3                       | 3200   | N/A             | N/A     |

## 2.8 RF Cables

Having selected RF connectors using the guidelines provided above, the next logical step is the selection of appropriate RF cables. There are a myriad of coaxial cable types to choose from. As with the RF coaxial connectors, coaxial cables are classified by physical characteristics as well as electrical parameters. Both flexible, semi-flexible or rigid armored cables are available. Electrical parameters such as characteristic impedance (50 and 75 ohms are common values), insertion loss, maximum voltage and maximum power capabilities must be considered. The application will determine the proper cable choice. Some applications require low loss cable to maximize power transmission. Other applications require flexible cables, perhaps without restrictive armor, for user friendliness. Coaxial cables contribute to the overall performance of the RF assembly and can become a limiting factor for maximum frequency and power handling capability. It is important to keep in mind that any cable assembly will be limited both in frequency and power handling capability by the lowest power rated and frequency capable RF connector.

To facilitate cable selection, AR/ RF Microwave Instrumentation has developed a line of high quality, built-to-order coaxial cables. These low loss cables are characterized by very low VSWR and are tailored to the end users specific needs. There are four basic series; CC1, CC2, CC4 and CC5. Custom lengths are available in 0.1 meter increments with a variety of matched connectors.

**CC1 Series** – These are armored, low loss cables for applications to 18 GHz. They are available with SMA, TNC, N or 7-16 connectors.

**CC2 Series** – These are armored, low loss cables for applications to 40 GHz. They are available with 2.4mm, 2.92mm, 3.5mm, SMA, TNC or N connectors.

**CC4 Series** – These are high power, flexible cables for applications to 6 GHz. They are available with N, 7-16, DIN 7/8 EIA, or 1-5/8" EIA connectors.

**CC5 Series** – These are low loss cables compatible with higher power applications to 11 GHz. They are available with N, 7-16 DIN, C, or SC connectors.

## Summary

RF coaxial connectors and cables are often forgotten components of RF systems. It is important to review all of the specifications discussed when selecting the right RF coaxial connector for your specific application. As mentioned, thinking about the connectors does not end after the selection process. Continued proper care and maintenance will help to ensure accurate system operation. While they may not command the interest and attention of the more costly system components, improper selection of RF coaxial connectors and/or cables can render a sophisticated system ineffective, so it is important to carefully select connectors and cables that are best suited to accommodate your specific applications.



## OLD PROPAGATOR MEMORIES

# THE PROPAGATOR.

**Club Call VK2AMW**

**VOLUME 05/01 ISSUED 1st Feb, 2005. PRINTED BI MONTHLY  
PRICELESS.**

Meetings held second Tuesday of each month (except January).  
S.E.S building Montague Street, Nth Wollongong. Starting at 7:30pm.

Official newsletter of the  
ILLAWARRA AMATEUR RADIO SOCIETY INC.  
PO Box 1838 WOLLONGONG 2500.

WEB Page [www.iars.org.au](http://www.iars.org.au)

E-MAIL [secretary@iars.org.au](mailto:secretary@iars.org.au)



**Editor Dave VK2TDN**  
[davenn@optusnet.com.au](mailto:davenn@optusnet.com.au)

### News Flash....

IARS Affiliation With The WIA,  
Ted VK2ARA, reports that our club was the first to be recognised as affiliated with the new WIA

Greetings all, I would like to wish everyone a happy new year. I wonder how many new year resolutions have been made and broken already ☺. Presented in the issue is part 2 of a 2 part article by Fred Backer VK2JFB, On the life of Nicola Tesla. Jack Hayden VK2XQ also presents part 2 of his 6 metre article. Thanks to both of you a good conclusion to both these articles. The Indonesian tsunami and some good storms have kept me busy over the last 2 months with masses of data to be collected. The severe storm that crossed Sydney on the 2<sup>nd</sup> of Feb caused a good amount of damage in my area (Ryde) and for the first time in 5 years I had to go onto battery power for my 2m and 70cm radios at home due to power cuts. Some of my pics of the damage are available at <http://www.sydneystormcity.com/A050202.htm>


A reminder to all that I am looking for lots of articles for the newsletter for the coming year. Small construction articles are keenly sought, something that fills an A4 page would be great. So what have you been building?, what cool projects have you come across that would be worth sharing with others. Email them to me at the above address or post printed articles to me at my callbook address. Tho for the last choice it would be good if you could type out the article and email it and I could do the circuit drawings for it, if u have a printed copy. What DX have you been working? Any good 2m or 6m maybe some rare HF DX let us all know its good to hear what has been happening around the bands.

Read on and enjoy this issue of the Propagator

cheers Dave VK2TDN Editor



## A Construction Quickie

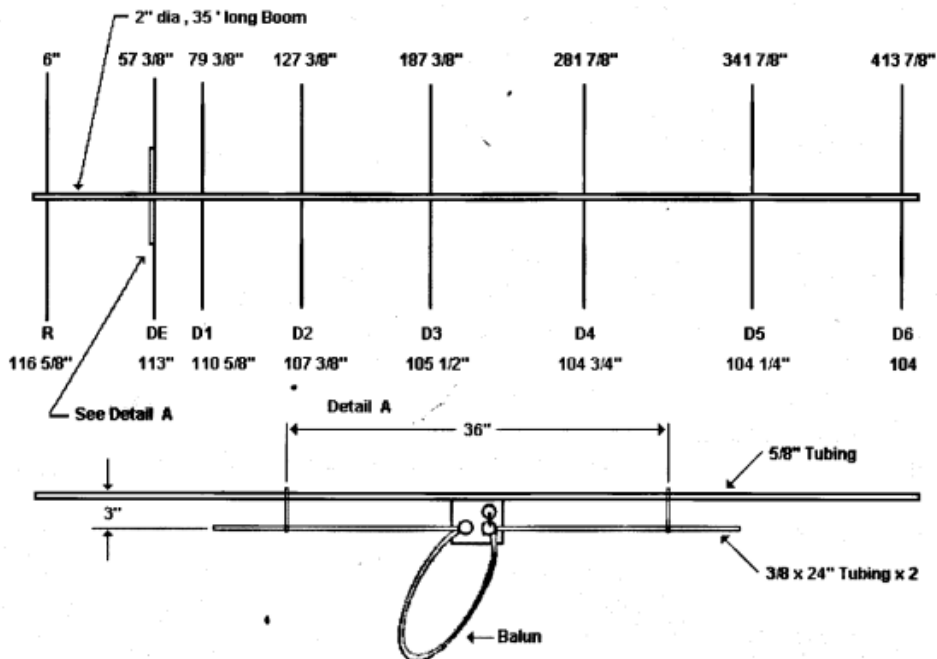

**fig. 6. Optimised eight element, 6 metre Yagi construction details. Element location referenced from rear of boom to prevent tolerance error buildup. A 4:1 halfwave balun made from RG 11 75 Ohm coax is used. Overall length of the balun including connectors is 78 inches, Coax can be coiled up in a 6 to 9 inch diameter loop and taped to the boom.**

A couple of pics of Dave VK2TDN and Vaughn VK2KBI doing some WBFM 10GHz experiments at Vaughn's location late Dec 2004.



Below, Vaughn is using my Gunnplexer with a 12x8 cm horn antenna and his IFR communications test as a 30MHz receiver. Unfortunately it isn't designed as a sensitive receiver and by the time we got to 700m between xceivers it couldn't hear the other transmitter. I need to build another WBFM 30MHz receiver and pre-amplifier.



## Presidents report for the propagator 27/01/05

Happy New Year to all members, it's good to be back after a hard earned break.

What's in store for this year? Well, it's up to all of us to make things happen. We as members of the best amateur radio club in Australia will continue as a club to prevail with your support. Every bit of assistance is appreciated and you would be surprised how far that goes. If every member did just a little, it soon adds up.

Financially, we are in quite a good position, in fact probably the best we have been for many years. Let's not get too complacent however, as with commercial interests etching away with site fees etc; we should always be on the look out to raise money and to conserve the money we have.

Just like business, we in the committee as bean counters must spend money in the right ways. I'm sure the members would expect, and have the right to expect that to happen.

It's great to see the smoke is settling after major changes with amateur radio throughout 2004.

Unfortunately, I can see no other way that long overdue changes could have been made. As they say, no pain no gain, and let's face it is human nature is to sit on ones hands.

Anyway this year certainly looks like it will be bigger and better than ever. I look forward to seeing more of you at the club meetings and who knows with members support maybe even a few special club events throughout the year.

Best 73's  
Tony Stone  
VK2TS  
IARS President

---

### Some more WWW Sites From Rob VK2XIC's Favourites List

<http://www.siliconchip.com.au/cms/search/index.html> (This site is very good)  
<http://au.geocities.com/vk3hjq/vk3hjq/packet.htm>  
<http://www.qsl.net/soundcardpacket/>  
<http://www.saao.ac.za/~wpk/map/sitemap.html#astronomy>  
<http://www.ve1alq.com/downloads/dishfeeds/dishfds.htm>  
<http://status.irlp.net/statuspage.html>  
<http://www.minikits.com.au/>  
<http://www.ukirlp.co.uk/>

## Bateman's Bay



Call in and visit Michael Corbin

266 Beach Road, Batehaven  
Phone 02 4472 7555

|  |
|--|
| We have the latest video titles, top quality games, DVD titles and a great selection of classics |
|--|



Art Union Tickets will again be available for sale by club members this year  
They will be available from Feb meeting and must be returned by March meeting.  
Making good sales of these tickets will ensure funds to pay for maintenance/licencing  
of at least one of our repeater sites

PLEASE support this fundraising activity it has worked so well for the club in past years

### Our Committee.

**President.** Tony Stone VK2TS [vk2ts@bigpond.net.au](mailto:vk2ts@bigpond.net.au) ph: 0404 839465  
**Vice President.** Rob McKnight VK2MT [mcknight@winnsy.com.au](mailto:mcknight@winnsy.com.au) 0408 480630  
**Secretary.** John Bennett VK2AAL [vk2aal@comcen.com.au](mailto:vk2aal@comcen.com.au) ph: 4297 6065  
**Treasurer.** John Lawer VK2KEJ ph: 4228 9856  
**Committee.**  
Ted Thrift VK2ARA [tthrift@iprimus.com.au](mailto:tthrift@iprimus.com.au) Ph:4272 9521  
Geoff Howell VK2HIC Ph:4276 1434 (Public Relations)  
Boris Rewak VK2JJJ [boza@ihug.com.au](mailto:boza@ihug.com.au)  
Peter Reid VK2HPR [vk2hpr@1earth.net](mailto:vk2hpr@1earth.net)  
Ned Macintosh VK2AGV [criticalmass@hotmail.net.au](mailto:criticalmass@hotmail.net.au)  
Daniel Brem VK2TAU [dan@knowmore.com.au](mailto:dan@knowmore.com.au) Ph 0419 288682  
**Fund Raising Committee.** Dom VK2SX, Peter VK2HPR  
**Editor.** Dave Nelson VK2TDN, e-mail [davenn@optusnet.com.au](mailto:davenn@optusnet.com.au) ph: 9808 5902  
**Publicity Officer.** Geoff Howell VK2HIC Ph:4276 1434  
**Membership secretary.** John Bennett VK2AAL [vk2aal@comcen.com.au](mailto:vk2aal@comcen.com.au) ph: 4297 6065  
**Repeater Committee.** Rob VK2MT, John VK2AAL  
**Canteen.** Leigh Whitmarsh, Peter VK2HPR.  
**Web Master.** Michael Eckardt VK2GNV, with help from Daniel VK2TAU.

Two cows are standing in a field. Daisy says to Dolly,  
"I was artificially inseminated this morning."  
"I don't believe you," said Dolly.  
"It's true, no bull!" exclaimed Daisy.

### NEWTEK ELECTRONICS

Phone and Fax 4227 1620

RESELLER FOR

Altronics Arista Jaycar Avico

Stockists of: Alarm Accessories, UHF Antennae,  
Tools, Computer Accessories, Test Equipment,  
Cables, Plugs, RF Sprays and Components for the  
Professional and the Amateur  
Call in and see Jack at 345 Keira St., Wollongong

**Will share more oldies next month.**

## YOTA Camp 27 - 29 October 2023 at Pattaya City, Thailand



- Electronics workshop
- Antenna building workshop
  - Fox hunting
- Radio station establishment and operation
- VHF, HF and Satellite contact experience
  - Local tour of Pattaya city

For more information please see link <https://www.wia.org.au/newsevents/news/2023/20230612-1/index.php>

## Dayton Hamvention 2023 breaks attendance record.



**XENIA** — A new attendance record was set at Hamvention this year.

**Hamvention 2024 is scheduled for May 17-19 2024.**


By WHIO Staff  
June 05, 2023





# *IARS Field Day Weekend*

## *To commemorate the*



*The Illawarra Amateur Radio Society is turning 75 years young this year, and to celebrate this, we are having a field weekend on the 15<sup>th</sup> and 16<sup>th</sup> July 2023 at our Penrose site.*

We are planning to have a fantastic weekend with a BBQ, Fox hunt and, it will coincide with the WIA Trans-Tasman Low Band contest on the 15<sup>th</sup> July 2023, perfect timing 😊

More info can be found here [https://www.iars.org.au/?page\\_id=43](https://www.iars.org.au/?page_id=43)

**RSVP Essential before the 14<sup>th</sup> July 2023**

Fox Hunting will also be held on the day and we also need to know if there is anyone wanting to participate that does not have DF equipment. The IARS will do our best to supply DF equipment to those that RSVP, first come first served.



**Our last fox hunt at the Penrose site**



# Upcoming Contests



The Trans-Tasman contest, held on the 3rd weekend in July, aims to encourage Low Band activity between VK and ZL

Only contest bands 160 80 and 40M are allowed with SSB, CW and Digital (RTTY OR PSK)

From 2018 this contest is an official WIA Contest and will count towards the Peter Brown Contest Champion Awards.

**Start Time is 08:00 UTC and finish time is 14:00 UTC 15<sup>th</sup> July 2023**

More information please use this link <https://www.wia.org.au/members/contests/transtasman/>



## Upcoming meeting presentations .....

- July 2023 : Show and Tell with a NANO VNA prize for the most interesting. (not necessarily the best presented) \*\* members will decide the winning presentation on the evening, if no clear winner the prize will move to next S&T
- August 2023 : IARS AGM, with a chinwag and Christmas in July August, possibly plum pudding. NEED TO RSVP for the delicious PLUM PUDS homemade by John VK2EJL
- September : Simon VK2KU , Projects for your Shack
- October : Show and Tell
- November : Auction with our hilarious and esteemed Simon VK2FO / XQX
- December : Xmas dinner



This Propagator is **your** newsletter, it lets **you** know what's happening with your society, including some info thrown in for your enjoyment of course 😊.

**The published content is only as good as the information sent to us.**

The **IARS needs YOUR input and support**, any technical items, amateur radio news, any projects you would like to share, in fact any AR related goings on is welcomed.

Feedback is also very important for us as it helps maintain a good read, if you would like to see more of something, or would like to see a subject added. Please let us know , [secretary@iars.org.au](mailto:secretary@iars.org.au)



# Fun Corner


Please send in your funnies to [iars.keithb@gmail.com](mailto:iars.keithb@gmail.com)



**GRILLED CHICKEN**



DIANE HAD ACCIDENTALLY SET HER GPS ON "SPOUSE" MODE.

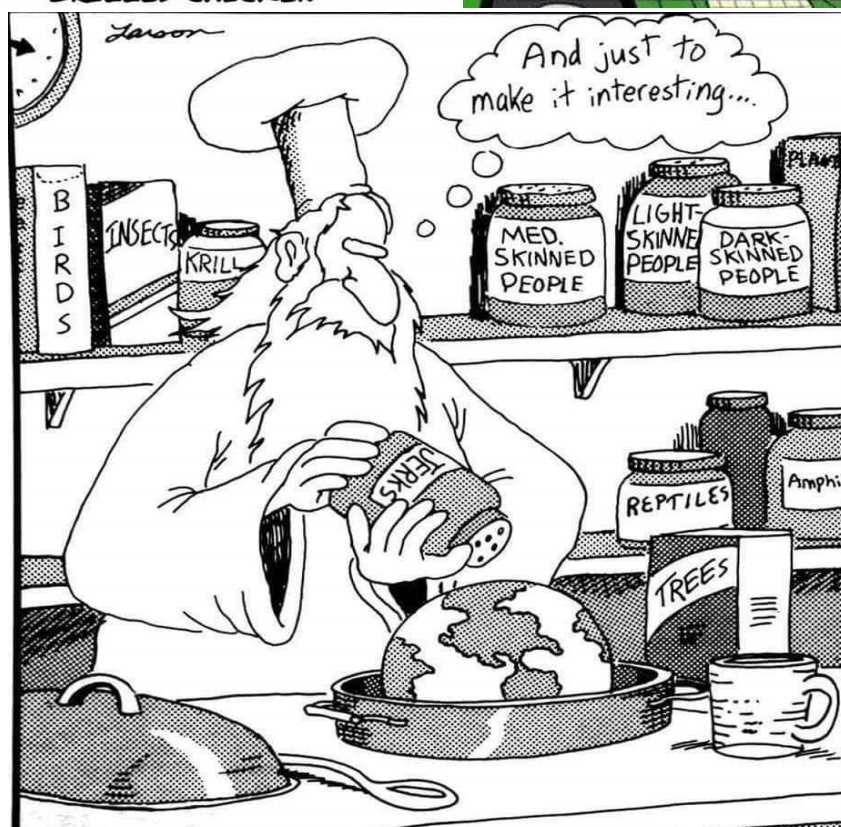

That's all for now, hopefully catch you all at the [Blue Scope visitors centre on the 11th of July 2023](#)

Stay Safe  
73's  
Keith VK2KQB  
IARS Secretary

**IARS, Amateur Radio in the Illawarra since 1948**